
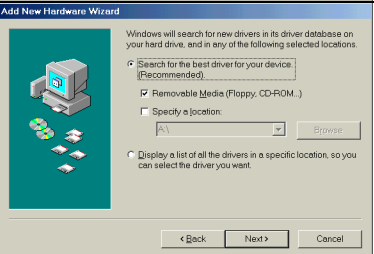
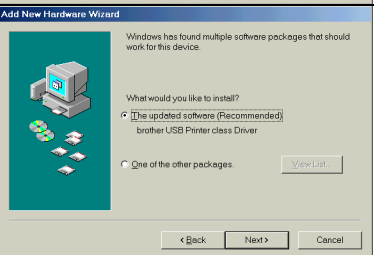
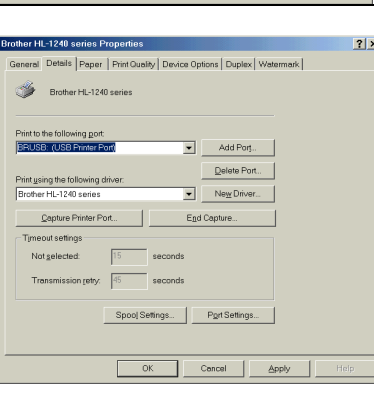


How to install the Printer driver for Windows Me users

HL-1030/1240/1250/1270N

	<p>This printer can be used on Microsoft® Windows® Me. In order to download the latest driver, access the Brother web site at: http://www.brother.com/ If you are using a parallel cable, see the Quick Setup Guide for Windows® 95/98. If you are using the USB interface, refer to the following instructions: Note: The screen shots are based on the HL-1240 printer.</p>
	<p>Step 1 Installing the printer driver:</p> <p>Follow the instructions on the Quick Setup Guide supplied. Refer to the section marked "For Windows users only".</p>
	<p>Step 2 Installing the USB driver:</p> <ol style="list-style-type: none">1. Make sure that the printer is switched on.2. Connect the USB interface cable to your PC then connect it to the printer.3. The "Add New Hardware Wizard" will appear. Check the "Specify the location of the driver (Advanced)" box. Click the Next button.
	<ol style="list-style-type: none">4. Check the "Removable Media (Floppy, CD-ROM...)" box. Click the Next button.
	<ol style="list-style-type: none">5. Check the "The updated software (Recommended)" box. Click the Next button and follow the on-screen instructions.
	<p>Step 3 Setting the PC printer port</p> <ol style="list-style-type: none">1. After your PC has restarted, click Start and select Settings and then Printers.2. In the printer's window, select your printer by clicking on the printers icon.3. Select File and Properties.4. Click the Details tab. Select the "BRUSB: (USB Printer Port)" in the "Print to the following port" box. Click the OK button. Setup is now completed.
<p>Troubleshooting</p>	<p>The USB driver is installed, but is unable to find the BRUSB:port</p> <ol style="list-style-type: none">1. Double-click the file "DeinsUSB.exe" in the USB directory of the CD-ROM.2. Turn the power switch off, then power on again. <p>The "Add New Hardware Wizard" will be launched again. Follow the instructions in the Wizard to re-install the driver.</p>